


Kondensator AUDIO AUDIO Capacitor

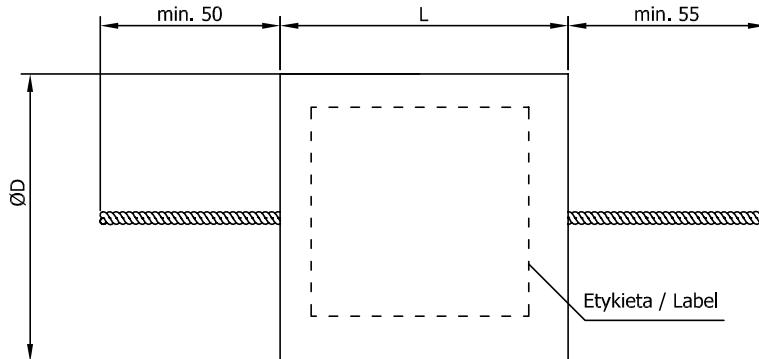

Pojemność znamionowa Rated capacitance	Tolerancja pojemności Capacitance tolerance	Wymiary / Dimensions	
		D+1	L+3/-2
μF	%	mm	mm
str. 2 / page 2			

Dane Techniczne / Technical data:

Napięcie znamionowe 250VDC
Rated voltage

(Uwagi/Notes)

Tg kąta stratności <0,0035 @ 1kHz
Dissipation factor

1. Wyrób spełnia wymagania Dyrektywy RoHS (2011/65/WE).
This product fulfils the requirements of the RoHS Directive (2011/65/EC).

Kategoria klimatyczna 25/70/21
Climatic category

Wymiary zgodnie z tabelą
Dimensions acc. to table

Description:


The KPCU-03 capacitors are made on the basis of paper and polypropylene dielectric films in a specially designed configuration. The capacitor section is impregnated with the use of a unique vacuum-based technology. The capacitor electrodes consist of solid copper foil. These capacitors feature housings formed from insulating resin paper tubes, terminals made of twisted copper wire 2x0,8mm, and self-extinguishing potting compound of flammability class V0. High quality and durability of the capacitors is assured by the use of carefully selected materials, production technology, as well as testing and measuring methods.

These capacitors are designed for use in audio equipment. The design of the capacitors and used technology during the production minimize the parasitic impedance components: inductance and resistance, resulting in improved quality of sound in a given audio system.


The capacitors are subjected to a series of specific tests and measurements, including a unique test using pulses of increased current amplitude and frequency of 22kHz.

The KPCU-03 capacitors can be used in d.c. and a.c. circuits within the temperature range of their climatic category. The d.c. voltage value or a.c. voltage amplitude should not exceed the specified rated voltage.

PRZYKŁADOWY NADRUK PRINTING LAYOUT EXAMPLE

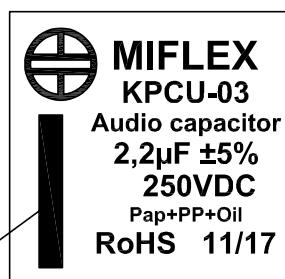

Oznakowanie
okładziny zewnętrznej
- krótkie
wyrowadzenie /
Marking of the outer
electrode - shorter
terminal

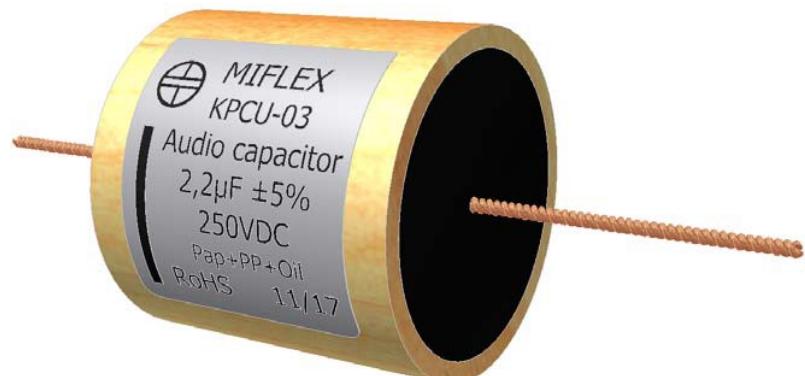

MIFLEX SA

ZAKŁADY PODZESPOŁÓW RADIOSŁOWYCH

99-300 KUTNO, ul.GRUNWALDZKA 3

Telefon: +48 24 355 11 00

Fax: +48 24 355 11 88

e-mail: miflexsa@miflex.com.pl

Data aktualizacji/Revision date
26.09.2019

Index: KPCU...

Strona/Page
1/2

Kondensator AUDIO AUDIO Capacitor

Kod EPD Ordering code	Pojemność znamionowa Rated capacitance	Tolerancja pojemności Capacitance tolerance	Wymiary / Dimensions	
			D+1	L+3/-2
-	μF	%	mm	mm
KPCU03F347...	0,047	J - $\pm 5\%$ K - $\pm 10\%$	20	40
KPCU03F356...	0,056		20	50
KPCU03F368...	0,068		22	50
KPCU03F382...	0,082		24	50
KPCU03F410...	0,10		26	50
KPCU03F412...	0,12		30	50
KPCU03F415...	0,15		36	50
KPCU03F418...	0,18		44	50
KPCU03F422...	0,22		40	70
KPCU03F427...	0,27		44	70
KPCU03F433...	0,33		50	70
KPCU03F439...	0,39		76	70
KPCU03F447...	0,47		86	70
KPCU03F456...	0,56		96	70
KPCU03F468...	0,68		86	125
KPCU03F482...	0,82		96	125
KPCU03F510...	1,0		96	180
KPCU03F512...	1,2			
KPCU03F515...	1,5			
KPCU03F518...	1,8			
KPCU03F520...	2,0			
KPCU03F522...	2,2			
KPCU03F527...	2,7			
KPCU03F530...	3,0			
KPCU03F533...	3,3			
KPCU03F539...	3,9			
KPCU03F540...	4,0			
KPCU03F547...	4,7			
KPCU03F556...	5,6			
KPCU03F560...	6,0			
KPCU03F568...	6,8			
KPCU03F582...	8,2			
KPCU03F590...	9,0			
KPCU03F610...	10,0			
KPCU03F615...	15,0			
KPCU03F618...	18,0			



MIFLEX SA

ZAKŁADY PODZESPOŁÓW RADIOSYNTESYZATORÓW
99-300 KUTNO, ul.GRUNWALDZKA 3

Telefon: +48 24 355 11 00

Fax: +48 24 355 11 88

e-mail: miflexsa@miflex.com.pl

Data aktualizacji/Revision date
26.09.2019

Index: KPCU...

Strona/Page
2/2